


## Features

Constructed using 48mm,76,90mm diameter, mandrel-bent 304G stainless steel or Galvanised.

Fully welded base plates (6mm) provide solid above-ground anchor points for the cycle stand.

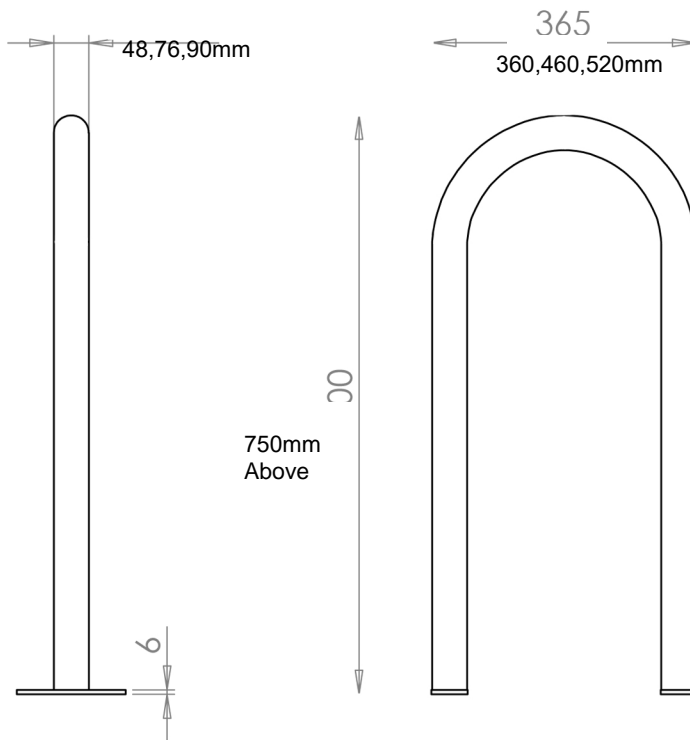

## Fixings required

For bolt-down type, use M12 diameter anchor bolts.  
4 No are required per stand, which can be supplied at extra cost.



Assessed to ISO 9001  
LPCB cert No.932

**bre**